

# DIGITAL AIR DATA & LEAK TESTER

Reliable products with outstanding service to ensure continued customer success.

## SIMPLIFY



- ✓ Automated Test Profiles
- ✓ Fast Leak Checks
- ✓ Lightweight & Portable

## PERFORM




- ✓ Precision Controls for GA
- ✓ Built-In Pumps
- ✓ Operates on Aircraft Power

## PROTECT



- ✓ Over-Range & Leak Protection
- ✓ Surge-Resistant Sensors
- ✓ Maintenance-Free Design

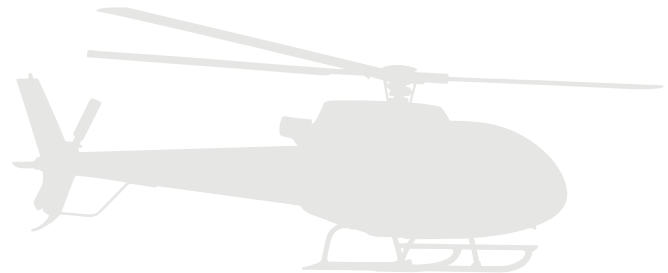

### *The Laversab Advantage*

#### OUTSTANDING SERVICE...



- ✓ Global service & support
- ✓ 3-5 day calibration turnaround
- ✓ Loaner units available
- ✓ In-region support center



#### ...FOR A LIFETIME.

- ✓ 3-Year standard warranty
- ✓ Free online training
- ✓ Free software updates
- ✓ System upgrades to extend capability

## SPECIFICATIONS

<b>STATIC OUTPUT</b>	<b>Pressure function</b>		<b>PITOT OUTPUT</b>	<b>Pressure function</b>	
	Accuracy	0.008 inHg		Accuracy	0.008 inHg
	Units	Feet, meters, inHg, mbar		Units	Knots, kmph, inHg, mba
	<b>Altitude function</b>			<b>Airspeed function</b>	
	Range	-2000 ft. to 60,000 ft		Range	0 to 500 knots
	Resolution	1 foot		Resolution	0.1 knots
	Accuracy	8 ft. @ 0 ft.		Accuracy	2.0 knots @ 50 knots
		24 ft. @ 35,000 ft.			1.0 knots @ 100 knots
		48 ft. @ 50,000 ft			0.5 knots @ 200 knots
		48 ft. @ 50,000 ft			0.2 knots @ 500 knots
<b>Climb function</b>		<b>DIMENSIONS &amp; WEIGHTS</b>	Leak Resolution	0.1 knot/min	
Range	0 ft/min to 10,000 ft/min	<b>OPERATING TEMP</b>	Main unit	18" x 12" x 7" ; 18 lbs	
Resolution	1 ft/min		Operating temp	0° to 50°C	
Leak Resolution	1 ft/min		Storage temp	-40° to 75°C	
<b>POWER REQUIREMENT</b>			Humidity	5 to 95% non-condensing	
90-260 VAC, 47-440 Hz					
50 VA					

